


INSTALLATION INSTRUCTIONS

BRASS COUPLING

1.

Cut the pipe straight and mark the insert depth according to the table below.

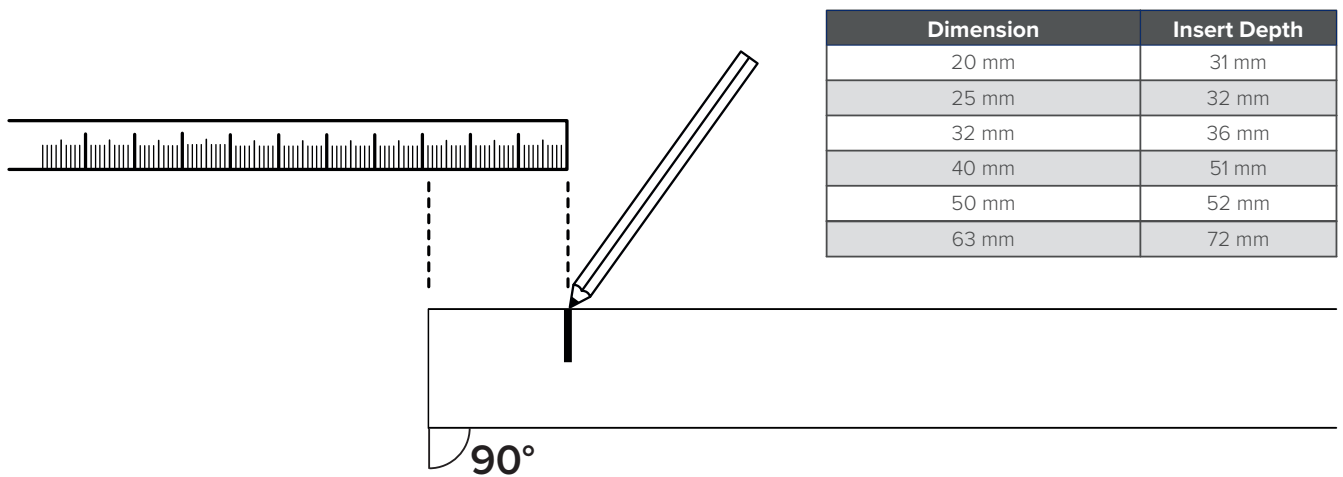

2.

Make shure that all componentents are in the coupling and loosen the nut (do not dismantle).

3.

Insert the pipe into the mark, tighten the nut to the body.

