

General information

Product

Isiflo Composite - Europe

Program operator:

Post Box 5250 Majorstuen, 0303 Oslo, Norway
The Norwegian EPD Foundation
Phone: +47 23 08 80 00
web: post@epd-norge.no

Declaration number:

NEPD-4046-3081-EN

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR Part A: Construction products and services. Ver. 1.0. March 2021

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 kg Isiflo Composite - Europe

Declared unit with option:

A1-A3,A4,A5,C1,C2,C3,C4,D

Functional unit:

1 kg of composite and packaging. Composite makes up over 80% of the weight in our sprint couplings. This general declaration therefore neglects rubber and POM.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD Norway, and iii) the process is reviewed annually. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPD Norway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Alexander Borg, Asplan Viak
(no signature required)

Owner of the declaration:

Isiflo AS
Contact person: Trond Brønstad
Phone: +47 61 15 27 00
e-mail: Info@isiflo.com

Manufacturer:

Isiflo AS

Place of production:

Isiflo AS
Grøndalsveien 2, 2830 Raufoss
Norway

Management system:

ISO 9001:2015, ISO 14001:2015.

Organisation no:

982 236 177

Issue date: 19.12.2022

Valid to: 19.12.2027

Year of study:

2021

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD:

Jonas Dalby

Reviewer of company-specific input data and EPD:

Trond Brønstad

Approved:



Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

Our composite products are made from glassfibre reinforced polyamid (PA12), developed for high strength and long life. The material technology together with the design makes the Isiflo products industry in strength and performance. Our composite couplings are lead free and corrosion resistant, which results in environmental friendly products with a very long lifetime.

Isiflo Sprint is a group of push-in couplings that combines strength, safety, durability and user friendliness. The interaction between the push-back ring, O-ring and the clamp ring gives a safe, leak free and tensile connection without the use of special tools.

For more information visit www.isiflo.com.

Product specification

Material: Composite glassfibre reinforced polyamid (PA12)

| Materials | kg | % |
|--------------------------------------|------|--------|
| Plastic - Polyamide with glass fibre | 0,80 | 100,00 |
| Total | 0,80 | |

| Packaging | kg | % |
|-----------------------|------|-------|
| Packaging - Cardboard | 0,07 | 34,01 |
| Packaging - Pallet | 0,12 | 62,70 |
| Packaging - Plastic | 0,01 | 3,29 |
| Total incl. packaging | 1,00 | |

Technical data:

Dimension: 20-25-32-40-50-63mm

POTTABLE WATER / WATER

Temperature: 0°C to 40°C
 MOP: 16 bars
 Pipes: PE 40, PE 80, PE 100 according to EN 12201.
 PVC according to EN 1452
 PEX pipes, if used with support liner.
 Thin-walled PE pipes SDR 17 PN6 collector pipes on a heat pump, if used with support liner.

LPG GAS OG HYDROGEN GAS:

Temperature: -20° to 40°
 MOP: 10 bars
 Pipe: PE 80, PE 100 in accordance with EN1555

PRODUCT APPROVALS:

Sintef Certification PS 1456
 RISE: SC0659-11
 KIWA: K5771
 DVGW: DW-8616CO0485

For more information visit: www.isiflo.com.

Market:

Europe

Reference service life, product

>50 years

Reference service life, building or construction works

>50 years

LCA: Calculation rules

Declared unit:

1 kg Isiflo Composite - Europe

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

| Materials | Source | Data quality | Year |
|--------------------------------------|---------------|---------------------|-------------|
| Packaging - Cardboard | ecoinvent 3.6 | Database | 2019 |
| Packaging - Pallet | ecoinvent 3.6 | Database | 2019 |
| Packaging - Plastic | ecoinvent 3.6 | Database | 2019 |
| Plastic - Polyamide with glass fibre | ecoinvent 3.6 | Database | 2019 |

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| Product stage | | | Construction installation stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundaries |
|---------------|-----------|---------------|---------------------------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|------------------------------------|
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| X | X | X | X | X | MND | MND | MND | MND | MND | MND | MND | X | X | X | X | X |


System boundary:

The analysis is a cradle-to-gate (A1 - A5) study.

It includes the extraction and production of raw materials, transportation to the production site, the production process itself and transport to the market.

With end-of-life study (C1-C4) and Recycling potential (D).

Environmental impacts in C1 are neglected due to manual work.

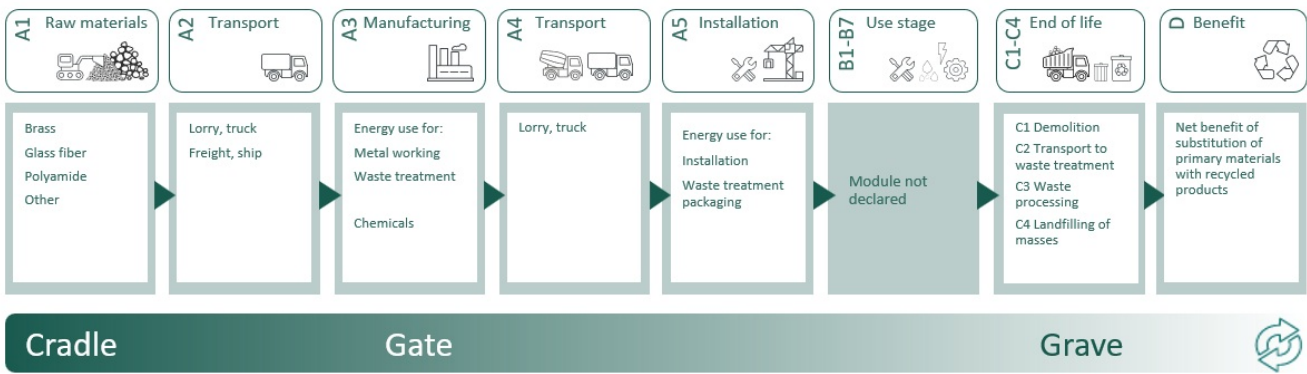

Additional technical information:














LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

| Transport from production place to user (A4) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
|--|---------------------------------------|---------------|-------------------------|-------|---------------------|
| Truck, 16-32 tonnes, EURO 6 (km) | 36,7 % | 2000 | 0,043 | l/tkm | 86,00 |
| Assembly (A5) | | | | | |
| | Unit | Value | | | |
| Waste, cardboard and paper, to average treatment - A5, inkl. transp. (kg) | kg | 0,07 | | | |
| Waste, plastic, mixture, to average treatment - A5, inkl. transp. (kg) | kg | 0,01 | | | |
| Waste, wood, average treatment - A5, inkl. transp. (kg) | kg | 0,12 | | | |
| Transport to waste processing (C2) | | | | | |
| | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
| Truck, 16-32 tonnes, EURO 6 (km) | 36,7 % | 85 | 0,043 | l/tkm | 3,66 |
| Waste processing (C3) | | | | | |
| | Unit | Value | | | |
| Waste, PAGF65 in municipal solid waste, for incineration (kg) - NO | kg | 0,80 | | | |
| Disposal (C4) | | | | | |
| | Unit | Value | | | |
| Landfilling of ashes from incineration of Non-hazardous waste in Norway, process per kg ashes and residues - C4 (kg) | kg | 0,59 | | | |

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

| Environmental impact | | | | | | | | | | |
|--|------------------------|-----------|----------|----------|----|----------|----------|----------|---|--|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D | |
|  GWP-total | kg CO ₂ -eq | 4,11E+00 | 3,27E-01 | 4,97E-03 | 0 | 1,39E-02 | 4,17E-01 | 6,07E-03 | 0 | |
|  GWP-fossil | kg CO ₂ -eq | 4,13E+00 | 3,27E-01 | 4,95E-03 | 0 | 1,39E-02 | 4,17E-01 | 6,00E-03 | 0 | |
|  GWP-biogenic | kg CO ₂ -eq | -1,92E-02 | 1,35E-04 | 1,73E-05 | 0 | 5,75E-06 | 7,27E-05 | 6,71E-05 | 0 | |
|  GWP-luluc | kg CO ₂ -eq | 2,41E-03 | 1,16E-04 | 1,26E-06 | 0 | 4,94E-06 | 6,27E-06 | 1,43E-06 | 0 | |
|  ODP | kg CFC11 -eq | 2,14E-07 | 7,40E-08 | 7,95E-10 | 0 | 3,15E-09 | 3,36E-09 | 7,35E-10 | 0 | |
|  AP | mol H+ -eq | 2,18E-02 | 9,39E-04 | 3,27E-05 | 0 | 3,99E-05 | 2,46E-04 | 2,42E-05 | 0 | |
|  EP-FreshWater | kg P -eq | 1,63E-04 | 2,61E-06 | 5,01E-08 | 0 | 1,11E-07 | 4,35E-07 | 7,30E-08 | 0 | |
|  EP-Marine | kg N -eq | 6,17E-03 | 1,86E-04 | 1,38E-05 | 0 | 7,90E-06 | 1,07E-04 | 7,33E-06 | 0 | |
|  EP-Terrestrial | mol N -eq | 4,63E-02 | 2,08E-03 | 1,44E-04 | 0 | 8,83E-05 | 1,10E-03 | 8,28E-05 | 0 | |
|  POCP | kg NMVOC -eq | 1,31E-02 | 7,96E-04 | 3,78E-05 | 0 | 3,38E-05 | 2,73E-04 | 2,30E-05 | 0 | |
|  ADP-minerals&metals ¹ | kg Sb -eq | 7,39E-05 | 9,02E-06 | 8,35E-08 | 0 | 3,84E-07 | 2,33E-07 | 4,33E-08 | 0 | |
|  ADP-fossil ¹ | MJ | 6,12E+01 | 4,94E+00 | 5,67E-02 | 0 | 2,10E-01 | 2,61E-01 | 6,04E-02 | 0 | |
|  WDP ¹ | m ³ | 3,73E+02 | 4,78E+00 | 8,73E-02 | 0 | 2,03E-01 | 7,16E-01 | 9,89E-02 | 0 | |

GWP total Global Warming Potential total; GWP fossil Global Warming Potential fossil fuels ; GWP biogenic Global Warming Potential biogenic; GWP luluc Global Warming Potential land use change; ODP Ozone Depletion; AP Acidification; EP freshwater Eutrophication aquatic freshwater; EP marine Eutrophication aquatic marine; EP terrestrial Eutrophication terrestrial ;POCP Photochemical zone formation; ADPE Abiotic Depletion Potential minerals and metals; ADPf Abiotic Depletion Potential fossil fuels;







"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Additional environmental impact indicators

| Indicator | | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|---|---------------------|-------------------|----------|----------|----------|----|----------|----------|----------|---|
|  | PM | Disease incidence | 1,91E-07 | 2,00E-08 | 4,16E-10 | 0 | 8,50E-10 | 2,07E-09 | 2,94E-10 | 0 |
|  | IRP ² | kgBq U235 -eq | 1,25E-01 | 2,16E-02 | 2,17E-04 | 0 | 9,18E-04 | 6,78E-04 | 2,47E-04 | 0 |
|  | ETP-fw ¹ | CTUe | 4,22E+01 | 3,66E+00 | 6,71E-02 | 0 | 1,56E-01 | 1,80E+00 | 9,06E-02 | 0 |
|  | HTP-c ¹ | CTUh | 1,99E-09 | 0,00E+00 | 6,00E-12 | 0 | 0,00E+00 | 1,16E-10 | 5,00E-12 | 0 |
|  | HTP-nc ¹ | CTUh | 8,68E-08 | 4,00E-09 | 2,67E-10 | 0 | 1,70E-10 | 4,16E-09 | 1,68E-10 | 0 |
|  | SQP ¹ | dimensionless | 5,29E+01 | 3,46E+00 | 3,60E-02 | 0 | 1,47E-01 | 1,54E-01 | 3,44E-02 | 0 |

PM Particulate Matter emissions; IRP Ionizing radiation – human health; ETP-fw Eco toxicity – freshwater; HTP-c Human toxicity – cancer effects; HTP-nc Human toxicity – non cancer effects; SQP Soil Quality (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed




1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

| Resource use | | | | | | | | | | |
|---|-------|----------------|----------|----------|----------|----|----------|----------|-----------|---|
| Indicator | | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|  | PERE | MJ | 2,66E+01 | 7,07E-02 | 1,11E-03 | 0 | 3,01E-03 | 8,62E-03 | 1,64E-03 | 0 |
|  | PERM | MJ | 2,80E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 |
|  | PERT | MJ | 2,94E+01 | 7,07E-02 | 1,11E-03 | 0 | 3,01E-03 | 8,62E-03 | 1,64E-03 | 0 |
|  | PENRE | MJ | 5,22E+01 | 4,94E+00 | 5,67E-02 | 0 | 2,10E-01 | 2,61E-01 | 6,41E-02 | 0 |
|  | PENRM | MJ | 9,13E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 |
|  | PENRT | MJ | 6,13E+01 | 4,94E+00 | 5,67E-02 | 0 | 2,10E-01 | 2,61E-01 | 6,41E-02 | 0 |
|  | SM | kg | 5,32E-03 | 0,00E+00 | 3,64E-05 | 0 | 0,00E+00 | 8,58E-03 | 2,06E-05 | 0 |
|  | RSF | MJ | 1,35E-01 | 2,53E-03 | 3,33E-05 | 0 | 1,08E-04 | 2,86E-04 | 1,11E-04 | 0 |
|  | NRSF | MJ | 2,74E-02 | 9,04E-03 | 3,06E-04 | 0 | 3,84E-04 | 1,49E-03 | -4,41E-05 | 0 |
|  | FW | m ³ | 2,14E-01 | 5,28E-04 | 3,69E-05 | 0 | 2,25E-05 | 9,31E-04 | 4,64E-05 | 0 |

PERE Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM Use of renewable primary energy resources used as raw materials; PERT Total use of renewable primary energy resources; PENRE Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM Use of non renewable primary energy resources used as raw materials; PENRT Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; FW Use of net fresh water

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"






*INA Indicator Not Assessed

| End of life - Waste | | | | | | | | | | |
|---|------|------|----------|----------|----------|----|----------|----------|----------|---|
| Indicator | | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|  | HWD | kg | 3,00E-02 | 2,55E-04 | 1,35E-03 | 0 | 1,08E-05 | 1,77E-01 | 1,30E-01 | 0 |
|  | NHWD | kg | 5,24E-01 | 2,40E-01 | 6,06E-03 | 0 | 1,02E-02 | 4,38E-02 | 2,72E-02 | 0 |
|  | RWD | kg | 1,14E-04 | 3,36E-05 | 3,29E-07 | 0 | 1,43E-06 | 9,08E-07 | 3,56E-07 | 0 |

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed;

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$ "

*INA Indicator Not Assessed

| End of life - Output flow | | | | | | | | | | |
|---|-----|------|----------|----------|----------|----|----------|----------|----------|---|
| Indicator | | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|  | CRU | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 |
|  | MFR | kg | 1,23E-01 | 0,00E+00 | 6,61E-02 | 0 | 0,00E+00 | 9,26E-03 | 1,14E-06 | 0 |
|  | MER | kg | 1,48E-03 | 0,00E+00 | 3,66E-07 | 0 | 0,00E+00 | 3,00E-06 | 1,63E-05 | 0 |
|  | EEE | MJ | 6,95E-02 | 0,00E+00 | 9,03E-02 | 0 | 0,00E+00 | 4,77E-01 | 2,22E-06 | 0 |
|  | EET | MJ | 1,05E+00 | 0,00E+00 | 1,37E+00 | 0 | 0,00E+00 | 7,21E+00 | 3,36E-05 | 0 |

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported energy Thermal

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$ "

*INA Indicator Not Assessed

| Biogenic Carbon Content | | |
|---|------|---------------------|
| Indicator | Unit | At the factory gate |
| Biogenic carbon content in product | kg C | 0,00E+00 |
| Biogenic carbon content in accompanying packaging | kg C | 8,26E-02 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix | Data source | Amount | Unit |
|---------------------------|---------------|--------|---------------------------|
| Electricity, Norway (kWh) | ecoinvent 3.6 | 24,33 | g CO ₂ -eq/kWh |

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

Not relevant.

Additional Environmental Information






| Environmental impact indicators EN 15804+A1 and NPCR Part A v2.0 | | | | | | | | | |
|--|--------------------------------------|----------|----------|----------|----|----------|----------|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP | kg CO ₂ -eq | 4,06E+00 | 3,24E-01 | 4,81E-03 | 0 | 1,37E-02 | 4,17E-01 | 2,55E-02 | 0 |
| ODP | kg CFC11 -eq | 2,02E-07 | 6,00E-08 | 6,47E-10 | 0 | 2,55E-09 | 2,97E-09 | 2,52E-09 | 0 |
| POCP | kg C ₂ H ₄ -eq | 8,02E-04 | 3,95E-05 | 9,30E-07 | 0 | 1,68E-06 | 5,53E-06 | 3,00E-06 | 0 |
| AP | kg SO ₂ -eq | 1,73E-02 | 6,45E-04 | 2,00E-05 | 0 | 2,74E-05 | 1,70E-04 | 5,68E-05 | 0 |
| EP | kg PO ₄ ³⁻ -eq | 3,20E-03 | 6,87E-05 | 5,69E-06 | 0 | 2,92E-06 | 5,61E-05 | 7,31E-06 | 0 |
| ADPM | kg Sb -eq | 7,36E-05 | 9,02E-06 | 8,35E-08 | 0 | 3,84E-07 | 2,33E-07 | 1,83E-07 | 0 |
| ADPE | MJ | 5,26E+01 | 4,84E+00 | 5,52E-02 | 0 | 2,06E-01 | 2,50E-01 | 2,55E-01 | 0 |
| GWPIOBC | kg CO ₂ -eq | 4,02E+00 | 3,27E-01 | 0,00E+00 | 0 | 1,39E-02 | 0,00E+00 | 2,55E-02 | 0 |

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources; GWP-IOBC/GHG Global warming potential calculated according to the principle of instantaneous oxidation (except emissions and uptake of biogenic carbon)

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21
 Author(s), (2022) EPD generator for EPD generator for NPCR 013
 Part B for Steel and Aluminum, Background information for EPD generator application and LCA data, LCA.no report number: 08.22
 NPCR Part A: Construction products and services. Ver. 2.0. April 2021, EPD-Norge.
 NPCR 013 Part B for Steel and Aluminium Construction Products , Ver. 4.0, 06.10.2021, EPD Norway.

www.isiflo.com - Product description and technical data.

| | | |
|---|--|--|
|  <small>Global Program Operator</small> | Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway | Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no |
|  | Owner of the declaration: Isiflo AS Grøndalsveien 2, 2830 Raufoss | Phone: +47 61 15 27 00 e-mail: Info@isiflo.com web: https://isiflo.no/ |
|  | Author of the Life Cycle Assessment LCA.no AS Dokka 6B, 1671 | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | Developer of EPD generator LCA.no AS Dokka 6B,1671 Kråkerøy | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | ECO Platform ECO Portal | web: www.eco-platform.org web: ECO Portal |